
LOW VOLTAGE

Process performance high
output cast iron motors



—
With expertise and a comprehensive portfolio of products and life-cycle services, we help value-minded industrial customers improve their energy efficiency and productivity.

Table of contents

004	Process Performance
005	Technical Data
006	Dimension Drawings
007	Motors in brief
008	Dimensions and mounting


Process performance cast iron motors

High output induction motors are high quality products designed for durability in the most demanding environments and tough applications. They are ideally suited to process industries and heavy duty applications – sectors like mining, cement and paper - where motors have to meet high requirements for reliability, availability and efficiency in harsh conditions.

New improved design
M3BP High output process performance motors in frame sizes 280,315 & 355. The new motors have improved electrical design to meet the requirements.

The new motors are compact and have improved lifting possibilities. The motor frames are also available for smart sensor.

Process performance cast iron motors, M3BP	Value
Frame sizes	280,315 & 355
Pole numbers	2,4,6
Product type	M3BP
Availability	Production

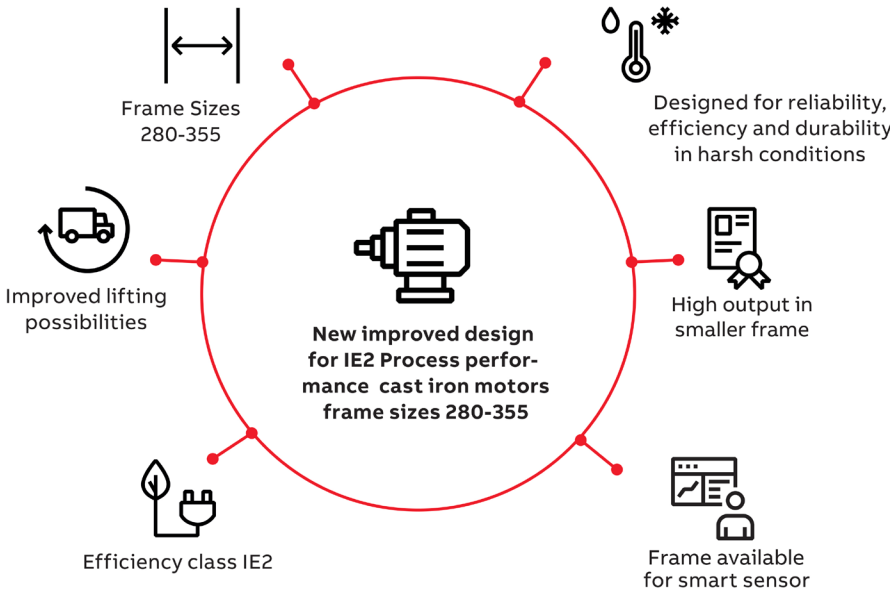

Technical data

IP55 - IC 411 - Insulation class F, Ambient 45°C (Temp rise class B, 75°C), S1 Duty, IE2 efficiency class according to IS 12615:2018, IEC 60034-30-1, 2014, 415V ± 10%, 50 ± 5% Hz, Combined Variation 10% (absolute)


2 Pole, 3000 rev/min.																	
Out put (kW)	Motor Type	Product Code	Speed (r/min)	Efficiency			Power factor		Current 50%	Current In		Torque			Moment of inertia J = 1/4 GD2 (kgm2)	Weight	Sound pressure level LPA (dB)
				FL 100%	FL 75%	FL 50%	100%	75%		Is (A)	Is/In (%)	Tn	Ts/Tn	Tmax/ Tn			
110	M3BP 280SMC 2	3GBP2 81230-ADG	2980	95.0	95.0	94.0	0.88	0.86	0.82	183	7.0	352	2.5	3.2	1.1	725	90
132	M3BP 280MLA 2	3GBP2 81410-ADG	2978	95.2	95.2	94.2	0.88	0.86	0.82	219	7.0	423	2.7	3.2	1.4	840	90
160	M3BP 280MLB 2	3GBP2 81420-ADG	2978	95.4	95.4	94.4	0.89	0.86	0.83	262	7.0	513	3.0	3.2	1.5	890	90
250	M3BP 315LKA 2	3GBP3 11810-ADG	2982	95.5	95.5	94.5	0.88	0.86	0.82	414	7.0	801	3.0	3.2	2.7	1440	90
315	M3BP 315LKC 2	3GBP3 11830-ADG	2983	95.5	95.5	94.5	0.88	0.86	0.81	521	7.0	1008	3.4	3.4	3.3	1630	90
400	M3BP 355MLA 2	3GBP3 51410-ADG	2984	95.5	95.5	94.5	0.85	0.83	0.77	685	7.0	1280	2.4	3.0	4.1	2000	90
450	M3BP 355MLB 2	3GBP3 51420-ADG	2985	95.5	95.5	94.5	0.88	0.85	0.80	745	7.0	1440	2.3	3.5	4.3	2080	90
500	M3BP 355LKA 2	3GBP3 51810-ADG	2983	95.5	95.5	94.5	0.89	0.86	0.80	818	7.0	1601	2.2	4.0	4.8	2320	90
560	M3BP 355LKB 2	3GBP3 51820-ADG	2984	95.5	95.5	94.5	0.88	0.85	0.80	927	7.0	1792	2.3	4.2	5.2	2460	90
4 Pole, 1500 rev/min.																	
110	M3BP 280SMC 4	3GBP282230-ADG	1486	95.1	95.1	94.1	0.85	0.81	0.72	189	7.0	707	3.2	3.2	1.9	725	85
132	M3BP 280MLA 4	3GBP282410-ADG	1485	95.3	95.3	94.3	0.85	0.81	0.73	227	7.0	848	2.9	3.0	2.3	840	85
160	M3BP 280MLB 4	3GBP282420-ADG	1485	95.5	95.5	94.5	0.84	0.79	0.70	278	7.0	1029	3.1	3.1	2.5	890	85
250	M3BP 315LKA 4	3GBP312810-ADG	1488	95.5	95.5	94.5	0.84	0.80	0.72	434	7.0	1604	2.7	3.1	4.4	1410	85
280	M3BP 315LKB 4	3GBP312820-ADG	1488	95.5	95.5	94.5	0.86	0.83	0.75	474	7.0	1797	2.8	3.3	5.0	1520	85
315	M3BP 315LKC 4	3GBP312830-ADG	1489	95.5	95.5	94.5	0.85	0.82	0.72	540	7.0	2020	2.8	3.4	5.5	1600	85
400	M3BP 355MLA 4	3GBP352410-ADG	1490	95.5	95.5	94.5	0.83	0.80	0.70	702	7.0	2563	2.4	2.7	8.4	2140	85
450	M3BP 355MLB 4	3GBP352420-ADG	1491	95.5	95.5	94.5	0.83	0.80	0.69	790	7.0	2882	2.4	3.0	8.4	2140	85
500	M3BP 355LKA 4	3GBP352810-ADG	1491	95.5	95.5	94.5	0.84	0.80	0.70	867	7.0	3202	2.1	3.2	10.0	2500	85
6 Pole, 1000 rev/min.																	
75	M3BP 280SMC 6	3GBP283230-ADG	991	94.3	94.3	93.3	0.83	0.80	0.72	133	7.0	723	3.0	2.9	2.8	725	85
90	M3BP 280MLA 6	3GBP283410-ADG	990	94.1	94.1	93.1	0.79	0.74	0.64	168	7.0	868	2.6	2.7	3.1	840	85
110	M3BP 280MLB 6	3GBP283420-ADG	991	94.4	94.4	93.4	0.80	0.75	0.65	203	7.0	1060	2.9	2.8	4.1	890	85
160	M3BP 315LKA 6	3GBP313810-ADG	992	95.3	95.3	94.3	0.82	0.77	0.67	285	7.0	1540	2.8	3.0	7.3	1410	85
180	M3BP 315LKB 6	3GBP313820-ADG	992	95.4	95.4	94.4	0.82	0.78	0.68	320	7.0	1733	2.9	3.1	8.3	1520	85
200	M3BP 315LKC 6	3GBP313830-ADG	990	95.5	95.5	94.5	0.84	0.81	0.73	347	7.0	1929	2.7	2.8	9.2	1600	85
355	M3BP 355LKA 6	3GBP353810-ADG	993	95.5	95.5	94.5	0.79	0.73	0.62	655	7.0	3414	2.8	3.0	15.5	2500	85
400	M3BP 355LKB 6	3GBP353820-ADG	993	95.5	95.5	94.5	0.81	0.75	0.62	719	7.0	3846	2.6	2.8	16.5	2600	85

* 2 pole - Unidirection Fan from 200kW to 560kW - Direction of rotation must be stated when ordering, see variant codes 044 and 045.
In = Nominal or rated current Is = Starting current Note: 1. All performance figures are subject to IEC/IS tolerances.
Tn = Nominal or rated torque in Nm Ts = Starting Torque 2. For Higher Ambient requirement contact sales team
Tmax = Maximum torque

Dimensions drawings

Process performance IE2 efficiency cast iron motors

Foot-mounted motor IM1001, B3 and Flange-mounted motor IM 3001, B5

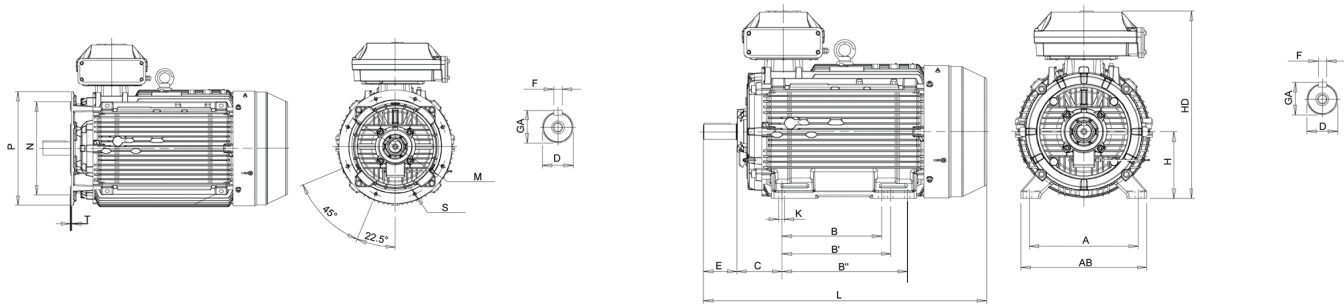

Motor size	D		GA		F		F		L MAX		A	B	B1	C	HD	K	H	M	N	P	S
	2	4-8	2	4-8	2	4-8	2	4-8	2	4-8											
280SM_	65	75	69	79.5	18	20	140	140	1053	1054	457	368	419	190	785	24	280	500	450	550	19
280ML_	65	75	69	79.5	18	20	140	140	1189	1189	457	368	419	190	785	24	280	500	450	550	19
315 SA	65	80	69	85	18	22	140	170	1088	1118	508	406	--	216	845	28	315	600	550	660	24
315 SM_	65	80	69	85	18	22	140	170	1190	1220	508	406	457	216	845	28	315	600	550	660	24
315 ML_	65	90	69	95	18	25	140	170	1285	1315	508	457	508	216	852	30	315	600	550	660	24
315 LK_	65	90	69	95	18	25	140	170	1491	1521	508	457	508	216	880	30	315	600	550	660	24
355 SM_	70	100	74.5	106	20	28	140	210	1409	1479	610	500	560	254	958	35	355	740	680	800	24
355 ML_	70	100	74.5	106	20	28	140	210	1514	1584	610	560	630	254	958	35	355	740	680	800	24
355 LK_	70	100	74.5	106	20	28	140	210	1764	1834	610	710	900	254	958	35	355	740	680	800	24

Motors in brief

Process performance cast iron motors

M3BP 280-355 High output

Output			280	315	355
Stator and end shields	Material		Cast iron		
	Paint colour shade		Munshell blue 8B 4.5/3.25		
	Corrosion class		C3 (medium)		
Feet	Material		Integrated cast iron feet		
Bearings	D-End	2-pole 4-6 pole	6316/C3 6316/C3	6316/C3 6319/C3	6316M/C3 6322/C3
	N-End	2-pole 4-6 pole	6316/C3 6316/C3	6316/C3 6316/C3	6316M/C3 6316/C3
Axially-locked bearings			Locked at D-end		
Bearing seals	D-End		V-ring or labrinth seal		
	N-End		V-ring or labrinth seal		
Lubrication			Regreasable bearings, regreasing nipples M10 x 1		
Measuring nipple for condition monitoring of the bearings			Included		
Rating plate	Material		Stainless steel		
Terminal box	Frame and cover		Cast iron	Cover steel	
	Corrosion class		C3 (medium)	Steel	
	Cover screws		Zinc-electroplated steel		
Connections	Cable entries		Refer cable details below		
	Terminals		6 terminals of connection (Cable lugs not included)		
	Cable gland		Suitable opening in terminal box, cable glands as option		
Fan	Material		Glass-fiber reinforced polypropylene		
Fan cover	Material		Sheet		
	Paint colour shade		Munshell blue 8B 4.5/3.25		
	Corrosion class		C3 Medium		
Stator winding	Material		Copper		
	Insulation		Insulation class F, temperature rise class B unless otherwise stated		
	Winding protection		3 PTC thermistors, 155°C		
Rotor winding	Material		Pressure diecast aluminium		
Balancing method			Half key balancing		
Key ways			Open key-way		
Drain holes			Drain holes with closable plastic plugs, open on delivery		
Enclosure			IP 55		
Cooling method			IC 411		

Cable Details

Rating kW	Maximum Cable Size	Conduit Size	Terminal; Box Type
110	2Rx3Cx240sqmm	2xM63x1.5	370*
132-160	2Rx3Cx240sqmm	2xM63x1.5	370*
250-280	2Rx3Cx240sqmm	2xM63x1.5	750*
315-560	4Rx3Cx240sqmm	4xM63x1.5	750*
* With adaptor for Cable Entry			

CONDITION MONITORING FOR LOW VOLTAGE MOTORS

Motors that let you know when it's time for service


Monitoring and maintenance of low voltage motors installed across a plant is time consuming and expensive

Failures or oversized motors add unnecessary costs

Many parts of the plant operate in "yesterday's world"

Nothing being sent, nothing being received. No value added from smart services.

Industrie 2.0



Industrie 4.0

Tomorrow's factory is smart, because it communicates



It gathers and shares data



Now millions of motors will become smart

Making intelligent services real for electric motors!





ABB Ability™ Smart Sensor

The gateway to tomorrow's smart factory

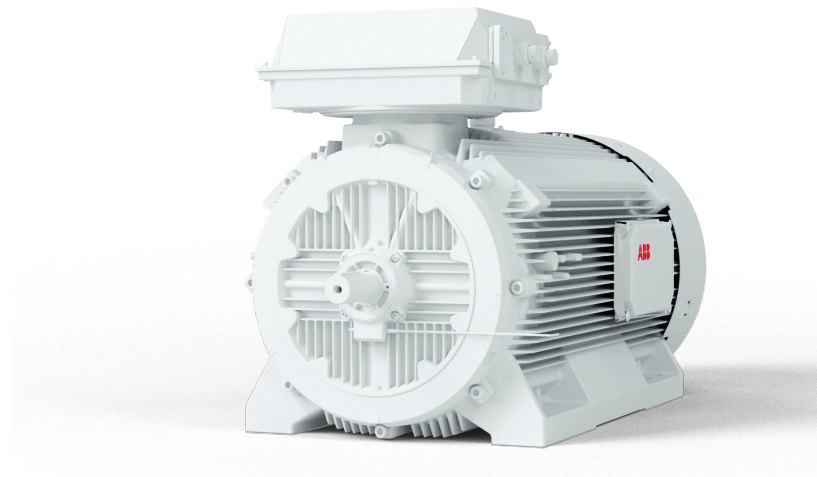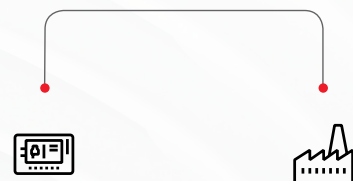

Your advantages
Simply attached directly to the motor

The ABB Ability™ Smart Sensor sends key operating data to the cloud



Motors let you know when it's time for service

ABB Ability™ Smart Sensor collects condition and performance data frequently



User-friendly information




with reports, performance charts and graphs



Measured and analysed data provides recommendations on how to optimize operations

For millions of motors predictive maintenance becomes reality

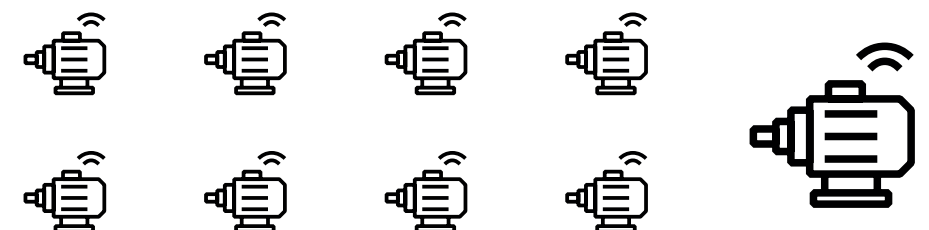



Notes

Lined area for notes, consisting of 20 horizontal dotted lines.



ABB India Limited

32, Industrial Area,
N.I.T., Faridabad - 121 001
Tel: +91 129 2448100

www.abb.co.in

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its content - in whole or in parts - is forbidden without ABB's prior written consent.